

ADG 158

Engine : Doosan
 Alternator : Mecc Alte
 Control System : P 732 control system



ISO8528 This generator set has been designed to meet ISO 8528 regulation.

SZUTEST This generator set is manufactured in facilities certified to ISO 9001.

CE This generator set is available with CE certification.

2000/14/EC Enclosed product is tested EU noise legislation 2000/14/EC

Rated Power, 3 Phase, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	158.00	126.00	143.00	114.00	206.00

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

Optional Equipments

ENGINE

- Remote Radiator Cooling
- Low Coolant level alarm
- Oil heater

ALTERNATOR

- Anti-Condensation heater
- Over sized alternator
- Main line circuit breaker

WISE ACCESSORIES

- Manual oil drain pump
- Electrical oil drain pump
- Enclosure: weater protective or sound attenuated
- Duct adapter (on radiator)
- Inlet and outlet motorised louvers
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant - 30 °C
- Automatic transfer switch

CONTROL SYSTEM

- Automatic synchronising and power control system (multi gen-set Parallel)
- Paralel system with mains.
- Remote annunciator panel
- Alarm output relays
- Remote communication with modem
- Earth fault, single set
- Charging ammeter

ADG 158

Engine : Doosan
 Alternator : Mecc Alte
 Control System : P 732 control system

➤ Natural Gas Powered Engine Specification

Manufacturer		Doosan
No. Of Cylinders and Build		6-cylinder, Sequential Type
Aspiration and Cooling		Turbo Charged and After Cooled
Maximum Standby Power	1500 d/dk	141.0kW[HP]
Total Displacement	L	191.0000
Bore and Stroke	Bore and Stroke	111 x 139
Compression Ratio		10,5 : 1
Rated Speed	rpm	1500
Governor		Electronic
Fuel Consumption	m ³ /h	31,8
Gas Pressure	mbar	70 - 300
Oil Capacity	L	23
Absorbed Air Discharge	m ³ /dk.	618
Disposal Air	m ³ /san	3,50
Exhaust Gas Flow	m ³ /dk.	990
Exhaust Gas Temperatures	° C	540
Electricity System		24 Vdc

➤ Alternator Specification

Manufacturer		Mecc Alte
Model		ECP34 - 2L
Power	kW	150
Design		Brushless, 4 poles
Cos fi		0,80
Phase		3
Voltage	V	400/230
5_ia	A	216
Insulation Class		H
Stator		2 / 3 steps
Excitation System		Electronic (AVR)


➤ Diemensions and Weight

Open Type	Dry Weight	Lenght	Width	Height
	kg.	mm.	mm.	mm.
	1700	2800	1150	1920
Sound Attenuated Type	Dry Weight	Lenght	Width	Height
	kg.	mm.	mm.	mm.
AK 61	3050	4000	1353	1882

ADG 158

Engine : Doosan
 Alternator : Mecc Alte
 Control System : P 732 control system

● P 732 control system - Control System

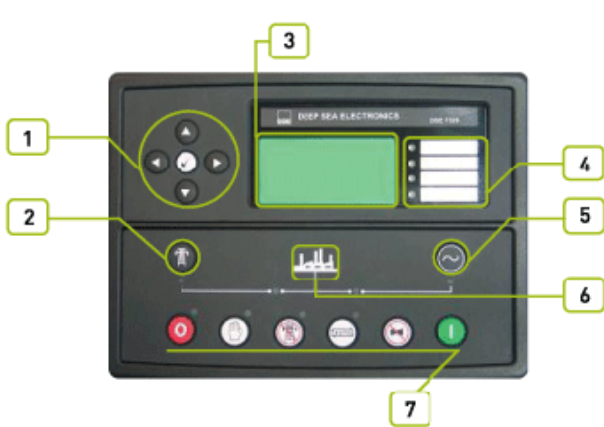

- 1 Menu navigation buttons
- 2 Close mains button
- 3 Main Status and instrumentation display
- 4 Alarm LED's
- 4 Close generator button
- 5 Status LED's
- 6 Operation selecting buttons

● Devices

DSE, model 7320 Auto Mains Failure control module
 Static battery charger 5A, 220/240 volt
 Emergency stop push button and fuses for control circuits

● Structure And Paint

Comonents installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
 Polyester composite powder topcoat forms high gloss and extremely durable finish
 Lockable hinged panel door provides for easy component access

● Montage

Control panel is mounted generating set baseframe on robust steel stand or power module.
 Located at side of generating set with properly panel visibility.

● Generator Control Unit

H\Y`8G9+' &\$Vtbfca cXi `Y`jg`U`g`ubXUfX`UXX]hcb`hc`ci`f`[`YbYfUhc`f`gYhg`Zca`&`\$`_J`5`i`dk`UfXg`UbX`ih`Uj`Y`VYYb`XYg]`bYX`hc`g`Ufh`UbX`g`r`cd`X]YgY`UbX[`Ug`[`YbYfU]h`b[`gYhg`h`Uh]bW`XY`Y`YVfcb]WUbX`bcb`Y`YVfcb]WYb[`]bYg`H\Y`8G9+' &\$]bW`XYg`h`Y`UXX]h`cbU`WdUV]`]mcZVY]b[`UV`Y`hc`a`cb]hc`f`U`a`U]bg`fi`h`]`]m`i`gi`dd`m`UbX`]g`h`YfYz`fy`gi`]hUV`Y`z`f`Vtbfca`]b[`U`g`ubXVm[`YbYfU]h`b[`gYh]b`Vtbfca`bV]cb`k`]h`Ub`Ui`hca`Uh]WfUbgZf`gk`]hW`H\Y`8G9+' &\$`U`gc`]bX]W]hYg`cdYfU]h`cbU`g`fU`h`g`UbX`Z]i`h`Vtbfca]h`cbgZ`Ui`hca`Uh]W`mg`i`h]b[`Xck`b`h`Y`[`YbYfU]h`b[`gYh`UbX`]bX]W]h]b[`Z]i`hg`Vma`Y`Ubg`cZ]hg`@7`8`X]gd`Umcb`h`Y`Z`cbhd`UbY`"

Microprocessor controlled
 132 x 64 pixel LCD display makes information easy to read
 Front panel programming and also via PC software
 Soft touch membrane keypad and five key menu navigation
 Remote communications via RS232, RS485 and ethernet and SMS messaging
 Event logging (50) showing date and time
 Multiple date and time engine exercise mode and maintenance scheduler

ADG 158

Engine : Doosan
 Alternator : Mecc Alte
 Control System : P 732 control system

Indicator

- ENGINE
- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due
- GENERATOR
- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earth current
- kW
- Pf
- kVAr
- kWh, kVAh, kVArh
- Phase sequence
- MAINS
- Voltage (L-L, L-N)
- Frequency

Protection

- WARNING
- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- PRE-ALARMS
- Low oil pressure
- High engine temperature
- Low engine temperature
- Over /Under speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning
- SHUT DOWNS
- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Over /Under speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Phase rotation
- ELECTRICAL TRIP
- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

Optional Properties

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm
- EXPANSION MODULES
- Editional LED module (2548)
- Expension relay module (2157)
- Expansion input module (2130)

Standards

- Electrical Safety / EMC compatibility
- BS EN 60950 Electrical business equipment
- BS EN 61000-6-2 EMC immunity standard
- BS EN 61000-6-4 EMC emission standard

Electronic Charge Equipment

6UHfYfmVXUf[Yf]g'a Ubi ZUVi fYX'k]h'gk]hW]b[!a cXY'UbX'GA 8 'hVWbc'c[mUbX'ih\Ug\] [\ YZV]bVWf
 6UHfYfmVXUf[Yf'a cXY'gfci hdi hJ !=VXUfUVWf]g]h]W]g]j YfmVcgy hc'gei UfY'UbX'ci hdi h]g') 'Ua dYfz&(j c'h87'"-ædi h%, '!
 &*\$j c'h57'"&(\$) \UgZ `mci hdi hg\chV]W]hdfchV]W]cb UbX'ihVUb VY'i gYX'Ug U'W ffYbhgci fVW"
 &(\$) VUf[Yf\Ug\] [\ YZV]bVWf]cb[`]Zž`ck 'ZU]i fY'fUfYž'] [\hk Y] [\hUbX`ck \YUhfUX]UfYX']b UUVæfXUbW'k]h']bYUf
 U'fYfbU]j Yg"
 H'Y VUf[Yf]g]h]X'k]h' U'dfchV]W]cb X]cXY UUVcgg'hY'ci hdi H'7\Uf[Y'ZU]`ci hdi h]g]Uj U]UV'Y'"7 cbbYVWVUf[Y'ZU]`fY'Um
 Væ] VYhk YYb'dcg]h] Y'ci hdi hUbX'7: 'ci hdi H'

ADG 158

Engine : Doosan
 Alternator : Mecc Alte
 Control System : P 732 control system



Introduction

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for generating sets from Aksa, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standart Specification

- Compact footprint, low profile design.
- Enclosure, generator set, exhaust system and fuel tank are pre-ssembled, pre-integrated and shipped as one package
- Body made from steel components treated with polyester powder coating
- Fire retardant foam insulation
- Easy access to all service points
- Exhaust system inside canopy
- Large doors on each side
- Control panel viewing window in a lockable access door
- Emergency stop push button mounted on enclosure exterior
- Cooling fan and battery charging alternator fully guarded
- Fuel fill and battery can only be reached via lockable access doors.
- Lifting points on the top of canopy and base frame
- Customer options available to meet your applications needs.
- Aksa makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Canopy Model		AK 61
Width	mm.	1353
Lenght	mm.	4000
Height	mm.	1882