

AGM 100

Engine : PSI
 Alternator : Mecc Alte
 Control System : P 732 control system



ISO8528 This generator set has been designed to meet ISO 8528 regulation.

SZUTEST This generator set is manufactured in facilities certified to ISO 9001.

CE This generator set is available with CE certification.

2000/14/EC Enclosed product is tested EU noise legislation 2000/14/EC

Rated Power, 3 Phase, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	100.00	80.00	90.00	72.00	129.00

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

Standart Specification

- Heavy duty, water cooled naturalgas engine
- 46/50 °C ambient rated radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket cooling heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel belows supplied separately
- Static battery charger
- Manual for use and installation

Optional Equipments

ENGINE

- Remote Radiator Cooling
- Low Coolant level alarm

ALTERNATOR

- Anti-Condensation heater
- Over sized alternator
- Main line circuit breaker

WISE ACCESSORIES

- Manual oil drain pump
- Electrical oil drain pump
- Enclosure: weater protective or sound attenuated
- Duct adapter (on radiator)
- Inlet and outlet motorised louvers
- Tool kit for maintenance
- Supplied with oil and coolant - 30 °C

CONTROL SYSTEM

- Remote annunciator panel
- Alarm output relays
- Earth fault, single set
- Charging ammeter

AGM 100

Engine : PSI
 Alternator : Mecc Alte
 Control System : P 732 control system

➤ Natural Gas Powered Engine Specification

Manufacturer	PSI	
Model	8,8 LNA	
No. of Cylinders and Build	8 Cylinder V Type	
Aspiration and Cooling	Naturally Aspirated	
Maximum Standby Power	1500 d/dk	96.0kW[128.6HP]
Total Displacement	L	8.8000
Bore and Stroke	Bore and Stroke	110,49x114,3
Compression Ratio	10:1	
Rated Speed	rpm	1500
Governor	Electronic	
Fuel Consumption	m ³ /h	21,4
Gas Pressure	mbar	27-300
Oil Capacity	L	9
Water Capacity	L	26
Exhaust Gas Flow	m ³ /dk.	14
Exhaust Gas Temperature	° C	491
Electricity System	12 Vdc	

➤ Alternator Specification

Manufacturer	Mecc Alte	
Model	ECP34 - 2S/4	
Power	kW	105
Design	Brushless, 4 poles	
Cos fi	0,80	
Phase	3	
Voltage	V	400/230
5_ia	A	1052
Insulation Class	H	
Stator	2 / 3 steps	
Excitation System	Electronic (AVR)	


➤ Diemensions and Weight

Open Type	Dry Weight	Lenght	Width	Height
	kg.	mm.	mm.	mm.
	1180	2150	1050	1532
Canopy	Dry Weight	Lenght	Width	Height
	kg.	mm.	mm.	mm.
AK 40	1410	3100	1113	1741

AGM 100

Engine : PSI
 Alternator : Mecc Alte
 Control System : P 732 control system

● P 732 control system - Control System

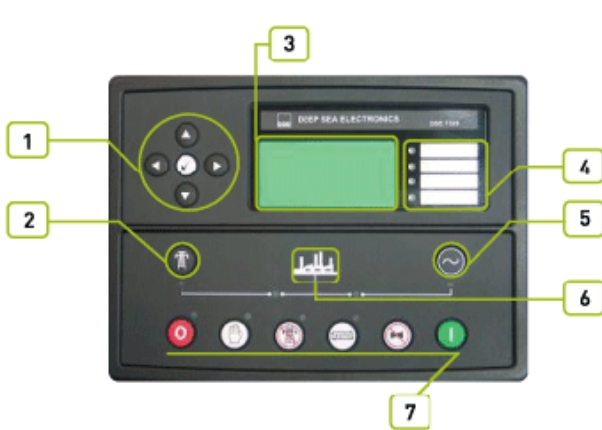

- 1 Menu navigation buttons
- 2 Close mains button
- 3 Main Status and instrumentation display
- 4 Alarm LED's
- 4 Close generator button
- 5 Status LED's
- 6 Operation selecting buttons

● Devices

DSE, model 7320 Auto Mains Failure control module
 Static battery charger
 Emergency stop push button and fuses for control circuits

● Structure And Paint

Comonents installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
 Polyester composite powder topcoat forms high gloss and extremely durable finish
 Lockable hinged panel door provides for easy component access

● Montage

Control panel is mounted generating set baseframe on robust steel stand or power module.
 Located at side of generating set with properly panel visibility.

● Generator Control Unit

The DSE 7320 conrol module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel andgas generating sets that include electronic and non electronic engines. The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Microprocessor controlled
 132 x 64 pixel LCD display makes information easy to read
 Front panel programming and also via PC software
 Soft touch membrane keypad and five key menu navigation
 Remote communications via RS232, RS485 and ethernet and SMS messaging
 Event logging (50) showing date and time
 Multiple date and time engine exercise mode and maintenance scheduler
 Engine block heater control.
 Controls; stop, manuel, auto, test, start, mute lamb test/transfer to generator, transfer to mains, menu navigation.

AGM 100

Engine : PSI
 Alternator : Mecc Alte
 Control System : P 732 control system

Indicator

- ENGINE
- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due
- GENERATOR
- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earth current
- kW
- Pf
- kVAr
- kWh, kVAh, kVArh
- Phase sequence
- MAINS
- Voltage (L-L, L-N)
- Frequency

Protection

- WARNING
- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- Loss of speed signal
- PRE-ALARMS
- Low oil pressure
- High engine temperature
- Low engine temperature
- Over /Under speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning
- SHUT DOWNS
- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Over /Under speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Phase rotation
- ELECTRICAL TRIP
- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

Optional Properties

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm
- EXPANSION MODULES
- Editional LED module (2548)
- Expension relay module (2157)
- Expansion input module (2130)

Standards


- Electrical Safety / EMC compatibility
- BS EN 60950 Electrical business equipment
- BS EN 61000-6-2 EMC immunity standard
- BS EN 61000-6-4 EMC emission standard

Electronic Charge Equipment

6UHYfmVUf[Yf]g'a Ubi ZVM fYX'k]H'gk]fV]b[!a cXY'UbX'GA 8'fVWbc`c[mUbX`ih\Ug`\][\ YZ]VbVWf
 6UHYfmVUf[Yf'a cXY`gfc i hdi hJ !=VUfUWVf]g]W]g] YfmVcgy`tc`gei UfY`&(\$)`\Ug`Z`mci hdi hg\chV]fV]hdfchV]cb`UbX
 ihVWb`VY`i gYX`Ug`U`W`ffYbhgci`fV`
 &(\$)`\Uf[Yf`\Ug`\][\ YZ]VbVWf]cb[``ZY`ck`Z]i`fy`fUfY`][\hk`Y][\hUbX`ck` \YUhfUX`UfYX`]b`UWf`fXUbW`k`h` ``]bYUf
 U`fYfbU]j`Yg`
 H`Y`VUf[Yf]g`Z]H`X`k`]H`U`dfchV]cb`X]cXY`UW`cgg`h`Y`ci`hdi`H`7`Uf[Y`Z]`ci`hdi`h]g`Uj`U]UV`Y``7`cbbYV]VUf[Y`Z]`fY`Um
 Vt`]`VYrk`YYb`dcb]h] Y`ci`hdi`hUbX`7:``ci`hdi`H`
 -bdi`h`%`*!&*(J`
 C`i`hdi`h`+z`J` `)5`cf`%`z`J` `)5`

AGM 100

Engine : PSI
 Alternator : Mecc Alte
 Control System : P 732 control system

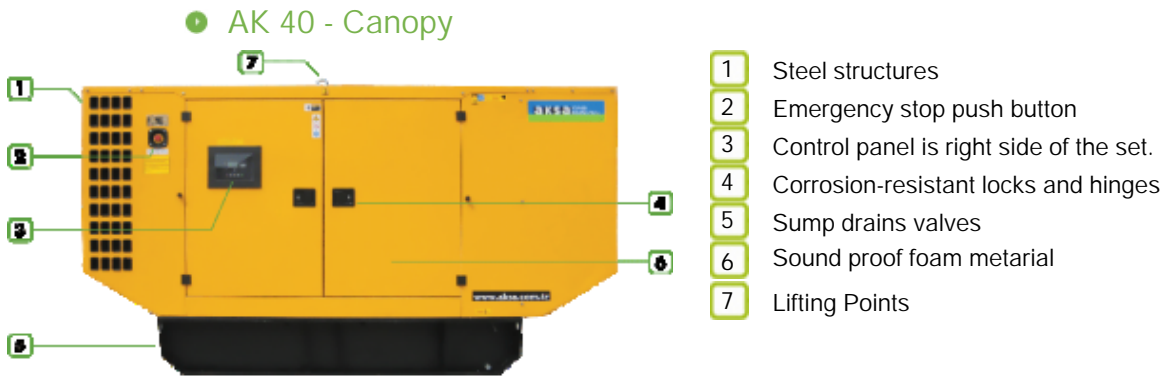

Introduction

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for generating sets from Akxa, meet event the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standart Specification

- Compact footprint, low profile design.
- Enclosure, generator set, exhaust system and fuel tank are pre-ssembled, pre-integrated and shipped as one package
- Body made from steel components treated with polyester powder coating
- Fire retardant foam insulation
- Easy access to all service points
- Exhaust system inside canopy
- Large doors on each side
- Control panel viewing window in a lockable access door
- Emergency stop push button mounted on enclosure exterior
- Cooling fan and battery charging alternator fully guarded
- Fuel fill and battery can only be reached via lockable access doors.
- Lifting points on the top of canopy and base frame
- Customer options available to meet your applications needs.
- Akxa makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Canopy Model		AK 40
Width	mm.	1113
Lenght	mm.	3100
Height	mm.	1741
Oil Capacity		240